



## Sleek Interior Single Pack PU

### PRODUCT DESCRIPTION

Sleek single pack PU Topcoat is polyurethane based clear topcoat designed to be used for all types of interior wood work. It provides a durable film that protects furniture from water, alcohol and other household chemicals. It is available in glossy & matt finish and is resistant to wear.



### PERFORMANCE FEATURES & BENEFITS

- Rich Finish
- Smooth feel

#### FINISH

**MATT**   **GLOSS**   SILK MATT

#### MIXING RATIO

NA

### RECOMMENDED USES

#### AREA



#### SURFACES

It can be used on all types of interior wooden substrates like doors, windows, furniture, kitchen cabinets etc.

### APPLICATION DETAILS & SURFACE PREPARATION

#### MIXING



Stir well before use

#### TOOLS



Brush, Spray

#### THINNING



Turpentine

#### THINNING RATIO

10-15% by volume

#### SURFACE DRYING TIME



30 minutes

#### FILLING



Sleek NC Sanding Sealer

#### APPLICATION ENVIRONMENT



Temperature: 10-40 Degree  
Humidity: Below 80%

#### CLEANING



Ensure that the wood is seasoned and the surface is well-dried.

- To remove the oiliness inherent to tannin rich wood such as teak and rose wood, wipe clean with NC thinner.

#### SURFACE PREPARATION



- Sand the wooden substrate along the grains, sequentially, with abrasive paper from grit numbers 80 to 180.
- The dust, dirt that comes out during the sanding process should be totally removed.
- Apply 2-3 coats of Sleek NC Sanding Sealer

#### APPLICATION



Apply 2 coats of Sleek Single Pack PU Topcoat by brush or spray. Allow 6-8 hours drying time between coats.

#### SAFETY FEATURES



No added Lead, Mercury or Chromium compounds

## TECHNICAL DATA

<b>Coverage</b>	6 - 7 sqm/L/Coat*
<b>Drying Time</b>	6-8 hours
<b>Sheen level</b>	90-95° - Glossy 10-15° - Matt
<b>Flash point</b>	Above 34°C.
<b>Stability of thinned paint</b>	NA
<b>Appearance</b>	Clear
<b>Solids</b>	50+/-1%
<b>Specific gravity</b>	0.9
<b>Recommended DFT</b>	25 to 30 microns per coat
<b>Viscosity @25°C by Stormer Viscometer</b>	-
<b>Pot life</b>	NA
<b>Shelf life</b>	36 months
<b>Contrast ratio</b>	NA

\*Practical Spreading Rate will vary from the quoted Theoretical Spreading Rate due to factors such as method and condition of application as well as surface roughness.

## PRECAUTIONS


- Flammable
- Keep away from heat, sparks etc.
- Use appropriate protection during application.
- Ensure adequate ventilation during application.

## POST APPLICATION INSTRUCTIONS

-

## AVAILABLE PACK SIZE

Available in:

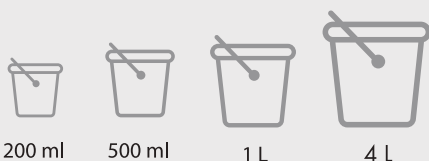

200 ml

500 ml

1 L

4 L

## SHADE RANGE

Clear, Teak, Walnut, Oak Yellow



INDIGO

Be surprised!